

Heuristic algorithms for the bipartite unconstrained 0-1 quadratic programming problem[☆]

Daniel Karapetyan^{a,*}, Abraham P. Punnen^a

^aDepartment of Mathematics, Simon Fraser University Surrey, Central City, 250-13450 102nd AV, Surrey, British Columbia, V3T 0A3, Canada

Abstract

We study the Bipartite Unconstrained 0-1 Quadratic Programming Problem (BQP) which is a relaxation of the Unconstrained 0-1 Quadratic Programming Problem. Applications of BQP include mining discrete patterns from binary data, approximating matrices by rank-one binary matrices, computing cut-norm of a matrix, and solving optimization problems such as maximum weight biclique, bipartite maximum weight cut, maximum weight induced subgraph of a bipartite graph, etc. We propose several classes of heuristic approaches to solve BQP and discuss a number of construction algorithms, local search neighborhoods and their combinations. Results of extensive computational experiments are reported to establish the practical performance of our algorithms. For this purpose, we propose several sets of test instances based on different applications of BQP.

Keywords: heuristics, quadratic programming, 0-1 variables, algorithms, neighborhoods, testbed

1. Introduction

The Unconstrained 0-1 Quadratic Programming Problem (QP) is to

$$\begin{aligned} & \text{maximize } f(x) = x^T Q' x + c' x + c'_0 \\ & \text{subject to } x \in \{0, 1\}^n, \end{aligned}$$

where Q' is an $n \times n$ matrix, c' is a row vector in \mathbb{R}^n , and c'_0 is a constant. QP is a well-studied problem in the operations research literature (Billionnet, 2004). The focus of this paper is on a problem closely related to the QP called the *Bipartite Unconstrained 0-1 Quadratic Programming Problem* (BQP) (Punnen et al., 2012). The BQP can be defined as follows:

$$\begin{aligned} & \text{maximize } f(x, y) = x^T Q y + c x + d y + c_0 \\ & \text{subject to } x \in \{0, 1\}^m, y \in \{0, 1\}^n, \end{aligned}$$

where $Q = (q_{ij})$ is an $m \times n$ matrix, $c = (c_1, c_2, \dots, c_m)$ is a row vector in \mathbb{R}^m , $d = (d_1, d_2, \dots, d_n)$ is a row vector in \mathbb{R}^n and c_0 is a constant. Without loss of generality, we assume that $m \leq n$ and $c_0 = 0$. In what follows, we denote a BQP instance built on matrix Q , row vectors c and d and $c_0 = 0$ as $\text{BQP}(Q, c, d)$, and (x, y) is a feasible solution of the BQP if $x \in \{0, 1\}^m$ and $y \in \{0, 1\}^n$. Also x_i stands for the i th component of the vector x and y_j stands for the j th component of the vector y .

By a simple transformation, the BQP can be formulated as a QP of size $m + n$, see (Punnen et al., 2012). Since any feasible solution of such a QP instance corresponds to a feasible solution of the original BQP, both exact and heuristic algorithms available to solve the QP can be used directly to solve the BQP. However, solving BQP instances by converting them into QP instances and then applying QP solvers is rather inefficient; indeed, the obtained QP instances are of larger size, and, further, QP algorithms cannot exploit the special structure of the problem. Thus, in this paper we focus on heuristics designed specifically for the BQP.

A graph theoretic interpretation of the BQP can be given as follows (Punnen et al., 2012). Let $I = \{1, 2, \dots, m\}$ and $J = \{1, 2, \dots, n\}$. Consider a bipartite graph $G = (I, J, E)$. For each node $i \in I$ and $j \in J$, respective costs c_i and d_j are prescribed. Further, for each $(i, j) \in E$, a cost q_{ij} is given. Then the *Maximum Weight Induced Subgraph Problem* on G is to find a subgraph $G' = (I', J', E')$ such that $\sum_{i \in I'} c_i + \sum_{j \in J'} d_j + \sum_{(i, j) \in E'} q_{ij}$ is maximized, where $I' \subseteq I$, $J' \subseteq J$ and G' is induced by $I' \cup J'$. The Maximum Weight Induced Subgraph Problem on G is precisely the BQP, where $q_{ij} = 0$ if $(i, j) \notin E$.

There are some other well known combinatorial optimization problems that can be modelled as BQP. Consider the bipartite graph $G = (I, J, E)$ with w_{ij} being the weight of the edge $(i, j) \in E$. Then the *Maximum Weight Biclique Problem* (MWBP) (Ambühl et al., 2011; Tan, 2008) is to find a biclique in G of maximum total edge-weight. Define

$$q_{ij} = \begin{cases} w_{ij} & \text{if } (i, j) \in E, \\ -M & \text{otherwise,} \end{cases}$$

[☆]This research work was supported by an NSERC Discovery grant awarded to Abraham P. Punnen.

*Corresponding author.

where M is a large positive number. Set c and d as zero vectors. Then BQP(Q, c, d) solves the MWBP (Punnen et al., 2012). This immediately shows that the BQP is NP-hard and one can also establish some approximation hardness results with appropriate assumptions (Ambühl et al., 2011; Tan, 2008). The MWBP has applications in data mining, clustering and bioinformatics (Chang et al., 2012; Tanay et al., 2002) which in turn become applications of BQP.

Another application of BQP arises in approximating a matrix by a rank-one binary matrix (Gillis and Glineur, 2011; Koyutürk et al., 2005, 2006; Lu et al., 2011; Shen et al., 2009). For example, let $H = (h_{ij})$ be a given $m \times n$ matrix and we want to find an $m \times n$ matrix $A = (a_{ij})$, where $a_{ij} = u_i v_j$ and $u_i, v_j \in \{0, 1\}$, such that $\sum_{i=1}^m \sum_{j=1}^n (h_{ij} - u_i v_j)^2$ is minimized. The matrix A is called a rank one approximation of H and can be identified by solving the BQP with $q_{ij} = 1 - 2h_{ij}$, $c_i = 0$ and $d_j = 0$ for all $i \in I$ and $j \in J$. Binary matrix factorization is an important topic in mining discrete patterns in binary data (Lu et al., 2011; Shen et al., 2009). If u_i and v_j are required to be in $\{-1, 1\}$ then also the resulting factorization problem can be formulated as a BQP.

The Maximum Cut Problem on a bipartite graph (Max-Cut) can be formulated as a BQP (Punnen et al., 2012) and this gives yet another application of the model. BQP can also be used to find approximations to the cut-norm of a matrix (Alon and Naor, 2006).

To the best of our knowledge, heuristic algorithms for the BQP were never investigated thoroughly in the literature except some result on variations of block coordinate descent type algorithm applied to BQP($Q, \mathbf{0}^m, \mathbf{0}^n$), where $\mathbf{0}^k$ is a zero vector in \mathbb{R}^k . We propose several classes of problem-specific heuristics and neighborhoods, provide efficient neighborhood exploration algorithms and discuss the performance of the obtained methods based on their theoretical properties and experimental results.

The paper is organized as follows. In Section 2, we present several algorithms for quick construction of BQP solutions. In Section 3, we propose more advanced heuristic approaches to solve the problem. Our testbed for experimental analysis is described in Section 4. The results of computational experiments are reported and discussed in Section 5. Finally, the concluding remarks are provided in Section 6.

2. Construction Heuristics

Let us start from a general observation. Assume that for some $i \in I$ both $c_i \geq 0$ and $q_{ij} \geq 0$ for all $j \in J$. Then the value of x_i can be fixed to 1, and this will preserve the optimal solutions. If $c_i \leq 0$ and $q_{ij} \leq 0$ for all $j \in J$, then x_i can be fixed to 0. Similar results can be obtained for the y_j variables. Thus, all the NP-hard instances have mixed positive and negative values of q_{ij} and/or c_i and d_j .

Hence, the objective of a feasible solution may be either negative or positive. However, the optimal objective values

are always non-negative since a *trivial solution* $(x, y) = (\mathbf{0}^m, \mathbf{0}^n)$ achieves $f(x, y) = 0$ for any problem instance. A trivial solution can be used as a starting point for an improvement heuristic. However, it is worth noting that this solution may turn out to be a deep local maximum for some local search neighborhoods and, thus, should be used carefully.

In order to obtain several different starting points, one can use *random* solutions. A random solution (x, y) is obtained by choosing x_i and y_j randomly for each i and j , respectively. Observe that the expected value $\mathbb{E}[f]$ of a random solution is

$$\mathbb{E}[f] = n_1 m_1 \bar{q} + m_1 \bar{c} + n_1 \bar{d}, \quad (1)$$

where n_1 and m_1 are the expected numbers of 1's in y and x , respectively, and \bar{q} , \bar{c} and \bar{d} are the averages of q , c and d . The values n_1 and m_1 can be calculated as $n_1 = \mathbb{E}[\sum_{j \in J} y_j] = n \cdot p(y_j = 1)$ and $m_1 = \mathbb{E}[\sum_{i \in I} x_i] = m \cdot p(x_i = 1)$. Thus, if $\bar{q} < 0$, $\bar{c} \leq 0$ and $\bar{d} \leq 0$, the expected objective value $\mathbb{E}[f]$ of a random solution will be negative. An attempt to improve such a solution with a simple local search will usually generate a trivial solution.

Thus, a better approach is to use the following construction heuristic. Let $positive(v) = v$ if $v \geq 0$ and $positive(v) = 0$ otherwise. Let $w_i^+ = c_i + \sum_{j \in J} positive(q_{ij})$. Order the rows of the problem such that $w_i^+ \geq w_{i+1}^+$ for $i = 1, 2, \dots, m-1$. On the i th iteration, choose the best value of x_i with the assumption that x_1, x_2, \dots, x_{i-1} are fixed, $x_{i+1} = x_{i+2} = \dots = x_m = 0$ and y is selected optimally. Note that the latter can be done efficiently since an optimal value of $y = y(x)$ given a fixed x is as follows:

$$y(x)_j = \begin{cases} 1 & \text{if } j \in J \text{ and } \sum_{i \in I} q_{ij} x_i + d_j > 0, \\ 0 & \text{otherwise,} \end{cases} \quad (2)$$

We call this algorithm *Greedy* and say that a solution produced by the Greedy algorithm is a *Greedy solution*. Our implementation of the Greedy heuristic (see Algorithm 1) terminates in $O(mn)$ time.

Below, we theorems prove some properties of the Greedy algorithm.

Remark 1. *If $m \leq 2$, the Greedy algorithm produces an optimal solution.*

Proof. Let $m = 1$. Then the Greedy algorithm tests all possible values of x and for each of those finds the optimal y , hence, yielding an optimal solution.

Let $m = 2$. Observe that the Greedy algorithm selects the best of solutions (x, y) , where $y \in \{0, 1\}^n$ and x is $x \in \{(0, 0)^T, (1, 0)^T, (1, 1)^T\}$. Observe also that if there exists an optimal solution (x, y) such that $x = (0, 1)^T$, then $f(x, y) = w_2^+$ and, hence, there exists another optimal solution (x', y') such that $x = (1, 0)^T$ and $f(x', y') = w_1^+ = w_2^+$. The result follows. \square

Algorithm 1: The Greedy algorithm implementation.

```

1 Order the rows of the problem such that  $w_i^+ \geq w_{i+1}^+$ 
  for  $i \in I \setminus \{m\}$ ;
2  $s_j \leftarrow d_j$  for  $j \in J$ ;
3 for  $i \leftarrow 1$  to  $m$  do
4    $f_0 \leftarrow \sum_{j \in J} \text{positive}(s_j)$ ;
5    $f_1 \leftarrow c_i + \sum_{j \in J} \text{positive}(s_j + q_{ij})$ ;
6   if  $f_0 \geq f_1$  then  $x_i \leftarrow 0$ ;
7   else
8      $x_i \leftarrow 1$ ;
9      $s_j \leftarrow s_j + q_{ij}$  for each  $j \in J$ ;
10 for  $j \leftarrow 1$  to  $n$  do
11   if  $s_j > 0$  then  $y_j \leftarrow 1$ ;
12   else  $y_j \leftarrow 0$ ;

```

Theorem 1. For $m > 2$, the Greedy algorithm provides a $\frac{1}{m-1}$ -approximation of the optimal solution, and this bound is sharp.

Proof. Let $w_i^+ = c_i + \sum_{j \in J} \text{positive}(q_{ij})$ and the rows to be ordered such that $w_i^+ \geq w_{i+1}^+$ for $i = 1, 2, \dots, m-1$. We assume that $w_1^+ > 0$ as otherwise the Greedy algorithm produces a trivial solution which is optimal.

Let (x^*, y^*) be an optimal solution of the problem. Assume $x_i^* = 0$ for some $i \in I$. Then the optimal objective $f(x^*, y^*)$ is at most $w_1^+ \cdot (m-1)$. Thus, if (x, y) is a Greedy solution,

$$\frac{f(x, y)}{f(x^*, y^*)} \geq \frac{w_1^+}{w_1^+ \cdot (m-1)} = \frac{1}{m-1}.$$

Now assume that $x_i^* = 1$ for each $i \in I$. Let $w_i^* = \sum_{j \in J} q_{ij} y_j^*$. Recall that, after two iterations, the Greedy algorithm produces an optimal solution for the problem consisting of the first two rows. Thus, $w_1^* + w_2^* \leq f(x, y)$. At the same time, $f(x, y) \geq w_1^+ \geq w_i^+ \geq w_i^*$ for any $i \in I$ and, hence,

$$\frac{f(x, y)}{f(x^*, y^*)} \geq \frac{f(x, y)}{f(x, y) + (m-2)f(x, y)} = \frac{1}{m-1}.$$

To establish that the $\frac{1}{m-1}$ bound is sharp, consider the following example, where $m = n$ and c and d are zero vectors:

$$Q = \begin{bmatrix} 1 & -n & -n & \cdots & -n \\ -n & 1 & 0 & \cdots & 0 \\ -n & 0 & 1 & & 0 \\ \vdots & \vdots & & \ddots & \\ -n & 0 & 0 & & 1 \end{bmatrix}.$$

Observe that (x, y) provides an optimal solution with objective value $f(x, y) = m-1$ if $x = y = (0, 1, 1, \dots, 1)^T$. Indeed, if $x_1 = 1$, then $y_2 = y_3 = \dots = y_n = 0$ and

$f(x, y) \leq 1$. Since the Greedy algorithm fixes $x_1 = 1$ on its first iteration, it yields a solution with objective value 1. The result follows. \square

3. Improvement Algorithms

The Greedy heuristic proposed above is usually not enough to produce solutions of sufficient quality. If that is the case, one can further improve the obtained solutions with some of the algorithms discussed in this section.

3.1. Alternating Algorithm

This approach is well-known as block coordinate descent algorithm in the non-linear optimization literature and was used to solve the BQP($Q, \mathbf{0}^m, \mathbf{0}^n$) problem. Further, we provide a brief definition of the algorithm for the BQP(Q, c, d) and discuss the ways to improve its performance.

Observe that, analogous to (2), given a fixed y , one can efficiently compute the optimal $x = x(y)$ using

$$x(y)_i = \begin{cases} 1 & \text{if } i \in I \text{ and } \sum_{j \in J} q_{ij} y_j + c_i > 0, \\ 0 & \text{otherwise.} \end{cases} \quad (3)$$

The *Alternating Algorithm* is a simple heuristic that alternatively fixes x and y to improve y and x , respectively, until a local optimum is reached, see Algorithm 2.

Algorithm 2: A naive implementation of the Alternating local search.

```

1  $\lambda \leftarrow 1$ ;
2 loop
3   if  $y(x) \neq y$  then
4      $y \leftarrow y(x)$ ;
5   else if  $\lambda = 0$  then break;
6    $\lambda \leftarrow 0$ ;
7   if  $y(x) \neq y$  then
8      $y \leftarrow y(x)$ ;
9   else break;

```

It takes $O(nm)$ time for the Alternating algorithm to explore the neighborhood $N_{\text{alt}}(x^0, y^0) = \{(x, y^0) : x \in \{0, 1\}^m\} \cup \{(x^0, y) : y \in \{0, 1\}^n\}$. It is easy to verify that $|N_{\text{alt}}(x^0, y^0)| = 2^m + 2^n - 1$.

Theorem 2. If a solution (x, y) is a local maximum in $N_{\text{alt}}(x, y)$, then $f(x, y) \geq 0$.

Proof. Consider a trivial solution $(\mathbf{0}^m, \mathbf{0}^n)$. Observe that $(\mathbf{0}^m, \mathbf{0}^n) \in N_{\text{alt}}(x, y)$ for any solution (x, y) . Since $f(\mathbf{0}^m, \mathbf{0}^n) = 0$ for any BQP instance, the objective of the best solution in $N_{\text{alt}}(x, y)$ is at least 0. \square

Our contribution is an improvement of the Alternating algorithm in terms of average running time. We noticed that, in practice, the number of iterations of the Alternating heuristic may be noticeable but, after a couple of iterations, only a few variables x_i and y_j are getting updated. By maintaining two arrays, namely s and w , one can reduce the time needed to calculate $x(y)$ and $y(x)$ to $O(m)$ and $O(n)$ time, respectively, see Algorithm 3. Updating the arrays s and w , though, takes $O(mn)$ time in the worst case but it is significantly faster if only a small number of values of x_i or y_j are modified. Thus, the improved implementation provides significantly better average performance while preserving the worst case time complexity. Observe also that such an implementation is much more friendly than Algorithm 2 with regards to CPU cache (Karapetyan et al., 2009).

Algorithm 3: An efficient implementation of the Alternating local search.

```

1  $s_j \leftarrow d_j + \sum_{i \in I} q_{ij} x_i$  for each  $j \in J$ ;
2  $w_i \leftarrow c_i + \sum_{j \in J} q_{ij} y_j$  for each  $i \in I$ ;
3  $\lambda \leftarrow -1$ ;
4 while  $\lambda \leq 0$  do
5    $\lambda \leftarrow \lambda + 1$ ;
6   for  $j \leftarrow 1$  to  $n$  do
7     if  $y_j = 0$  and  $s_j > 0$  then
8        $y_j \leftarrow 1$ ;  $\lambda \leftarrow 0$ ;
9        $w_i \leftarrow w_i + q_{ij}$  for each  $i \in I$ ;
10    else if  $y_j = 1$  and  $s_j < 0$  then
11       $y_j \leftarrow 0$ ;  $\lambda \leftarrow 0$ ;
12       $w_i \leftarrow w_i - q_{ij}$  for each  $i \in I$ ;
13  if  $\lambda = 1$  then break;
14   $\lambda \leftarrow 1$ ;
15  for  $i \leftarrow 1$  to  $m$  do
16    if  $x_i = 0$  and  $w_i > 0$  then
17       $x_i \leftarrow 1$ ;  $\lambda \leftarrow 0$ ;
18       $s_j \leftarrow s_j + q_{ij}$  for each  $j \in J$ ;
19    else if  $x_i = 1$  and  $w_i < 0$  then
20       $x_i \leftarrow 0$ ;  $\lambda \leftarrow 0$ ;
21       $s_j \leftarrow s_j - q_{ij}$  for each  $j \in J$ ;

```

3.2. Portions-Based Algorithms

Another approach to improve a BQP solution is to fix several variables x_i and to solve the resulting constrained problem. Let $\text{BQP}(Q, c, d, I^*, x^0)$ be defined as follows:

$$\begin{aligned}
& \text{maximize } x^T Q y + c x + d y \\
& \text{subject to } x_i = x_i^0 \text{ for } i \notin I^*, \\
& \quad x \in \{0, 1\}^m, y \in \{0, 1\}^n.
\end{aligned}$$

Observe that $\text{BQP}(Q, c, d, I^*, x^0)$ can be reduced to $\text{BQP}(Q^*, c^*, d^*)$, where $Q^* = (q_{ij})$ is a $k \times n$ matrix, c

is a vector in \mathbb{R}^k , d is a vector in \mathbb{R}^n and $k = |I^*|$. Indeed, let $I^* = \{\pi(1), \pi(2), \dots, \pi(k)\}$ and, for $i = 1, 2, \dots, k$, let

$$q_{ij}^* = q_{\pi(i), j}, \quad c_i^* = c_{\pi(i)} \quad \text{and} \quad d_j^* = d_j + \sum_{i \in I \setminus I^*} q_{ij} x_i^0.$$

Let (x^*, y^*) be an optimal solution of $\text{BQP}(Q^*, c^*, d^*)$, where $Q^* = (q_{ij}^*)$ is an $|I^*| \times n$ matrix. Define

$$x_i = \begin{cases} x_r^* & \text{if } i = \pi(r) \text{ for some } r, \\ x_i^0 & \text{otherwise} \end{cases} \quad \text{and} \quad y = y^*.$$

Then (x, y) is an optimal solution to $\text{BQP}(Q, c, d, I^*, x^0)$. The corresponding neighborhood $N_{I^*}(x^0, y^0) = \{(x, y) : x \in \{0, 1\}^m, y \in \{0, 1\}^n, x_i = x_i^0 \text{ for } i \notin I^*\}$ is of size $|N_{I^*}(x^0, y^0)| = 2^{|I^*|+n}$ and can be explored in $O(mn + n2^{|I^*|})$ time as it takes $O(mn)$ time to produce a reduced problem $\text{BQP}(q^*, c^*, d^*)$ and $O(n2^{|I^*|})$ time to solve it. Observe that, if $|I^*|$ is $O(\log m)$, the complexity of the first stage of the algorithm may dominate that of the second stage. When several neighborhoods $N_{I^*}(x, y)$ are to be explored, the total time complexity of the first stage can be reduced. In particular, by precalculating $s_j = d_j + \sum_{i \in I} q_{ij} x_i$ and further maintaining these values, one can explore κ neighborhoods $N_{I^*}(x, y)$ in $O(mn + \kappa n 2^{|I^*|})$ time. Hereafter, we assume this technique to be used in all implementations of the derived heuristics.

We now propose several improvement algorithms exploiting this approach. Consider *Exhaustive Portions* neighborhood defined as follows:

$$N_{\text{ex}}^k(x, y) = \bigcup_{I^* \subset I, |I^*|=k} N_{I^*}(x, y).$$

Observe that the intersection $N_{I^*}(x, y) \cap N_{I^{**}}(x, y)$, where $I^*, I^{**} \subset I$, may be significant. To avoid re-exploring candidate solutions, we start from enumerating all the subsets $I^* \subset I$ of size 1, then we enumerate all the subsets $I^* \subset I$ of size 2, etc. For each subset, we only need to test one value of $x = x^*$, where

$$x_i^* = \begin{cases} 1 - x_i & \text{if } i \in I^*, \\ x_i & \text{otherwise.} \end{cases} \quad (4)$$

For details see Algorithm 4.

With the above algorithm, the Exhaustive Portions neighborhood is of size $|N_{\text{ex}}^k(x, y)| = 2^n \cdot \sum_{p=0}^k \binom{m}{p}$ and can be explored in $O(\binom{m}{k} n) \subset O(m^k n)$ time. Thus, for a reasonably large instance, it is normally possible to use the Exhaustive Portions local search only with a very small k . When $k = 1$, the algorithm becomes a simple local search that we call *Flip* heuristic. The corresponding neighborhood $N_{\text{flip}}(x^0, y^0) = \{(x^0, y^0)\} \cup \{(x, y) : x \in \{0, 1\}^m, y \in \{0, 1\}^n \text{ and } \sum_{i \in I} |x_i - x_i^0| = 1\}$ is of size $|N_{\text{flip}}(x, y)| = m2^n + 1$ and can be explored in $O(mn)$ time. Observe that $N_{\text{flip}}(x, y)$ is larger than $N_{\text{alt}}(x, y)$ although the time complexity of the corresponding exploration algorithms is

Algorithm 4: An efficient implementation of the Exhaustive Portions local search.

```

1  $\lambda \leftarrow 1$ ;
2 while  $\lambda = 1$  do
3    $\lambda \leftarrow 0$ ;
4   for  $p \leftarrow 1$  to  $k$  do
5      $\mu \leftarrow 0$ ;
6     while  $\mu < \binom{m}{p}$  do
7       Select next  $I^* \subset I$ ,  $|I^*| = p$ ;
8       Calculate  $x^*$  according to (4);
9       if  $f(x^*, y(x^*)) > f(x, y(x))$  then
10         $x \leftarrow x^*$ ;
11         $\mu \leftarrow 0$ ;
12        if  $p > 1$  then  $\lambda \leftarrow 1$ ;
13        else  $\mu \leftarrow \mu + 1$ ;
14    if  $\lambda = 1$  then break;
```

the same. This may indicate superior quality of the Flip heuristic.

Note that $N_{\text{flip}}(x^0, y^0)$ is not exactly equal to $N_{\text{ex}}^1(x^0, y^0)$. Observe that most of the BQP heuristics yield solutions such that y is already optimal for the given x . Thus, in our implementation of the Flip heuristic, we avoid exploration of solutions that are different from the given one only in y .

Another strategy is to consider only a limited number of subsets $I^* \in I$, each of a larger size k . The resulting algorithm is called *Random Portions* improvement heuristic which proceeds as follows. Let k , $1 < k \leq m$, be a parameter of the algorithm. Randomly select a set $I^* \subset I$ such that $|I^*| = k$. Replace the solution (x, y) with the best solution in $N_{I^*}(x, y)$ and proceed to the next random set I^* . Terminate when either the prescribed number of iterations is completed or the given time limit is reached. The time complexity of the Random Portions algorithm is $O(mn + \kappa n 2^k)$, where κ is the number of iterations, and the size of the explored neighborhood $N_{\text{port}}^{k, \kappa}(x^0, y^0)$ is bounded by $|N_{\text{port}}^{k, \kappa}(x^0, y^0)| \leq \kappa 2^{k+n}$.

3.3. Variable Neighborhood Descent

Given sufficient k , the Random Portions heuristic may be effective in removing a solution from a deep local maximum but it may be unnecessary slow when applied to low quality solutions. Thus, a good strategy is to start from a fast heuristic and, when it reaches a local maximum, apply the Random Portions algorithm for some k . If it succeeds in removing the solution from the local maximum, go back to the fast heuristic. Otherwise proceed to the Random Portions algorithm with a larger value of k . Such an algorithm can be viewed as an implementation of the Variable Neighborhood Descent (VND) (Hansen and Mladenović, 2003), and we implemented it as discussed in Algorithm 5.

Algorithm 5: The VND heuristic.

```

1 Produce a solution  $(x, y)$  with the Greedy algorithm;
2  $\lambda \leftarrow 1$ ;
3 while  $\lambda = 1$  do
4    $\lambda \leftarrow 0$ ;
5   Improve the solution  $(x, y)$  with the Alternating local search;
6   Improve the solution  $(x, y)$  with the Flip local search;
7   if the solution was improved by the Flip local search then
8      $\lambda \leftarrow 1$ ;
9   else
10    for  $k \leftarrow 2$  to  $p$  do
11      for  $\ell \leftarrow 1$  to  $m$  do
12        Select a random  $I^* \subseteq I$  such that  $|I^*| = k$  and  $\ell \in I^*$ ;
13        Fix  $x_i$ ,  $i \notin I^*$  and solve the remaining problem exactly;
14        if the solution was improved, set  $\lambda \leftarrow 1$ ;
15 return the objective of  $(x, y)$  and  $(x, y)$ ;
```

In our VND, the initial solution is constructed with the Greedy heuristic. Then it is repeatedly improved with Alternating and Flip heuristics until a local maximum in $N_{\text{alt}}(x, y) \cup N_{\text{flip}}(x, y)$ is reached. Next, the Random Portions ($k = 2$) local search is applied. If it does not succeed, the Random Portions ($k = 3$) local search is applied, etc. If at some point the solution is improved, the algorithm restarts with Alternating and Flip heuristics.

The VND neighborhood $N_{\text{VND}}(x, y)$ is defined as follows:

$$N_{\text{VND}}(x, y) = N_{\text{alt}}(x, y) \cup N_{\text{flip}}(x, y) \cup \bigcup_{p=2}^k N_{\text{port}}^{p, m}(x, y). \quad (5)$$

Let us calculate the intersections of the components of (5). Observe that the intersection of the first two neighborhoods is small: $N_{\text{alt}}(x^0, y^0) \cap N_{\text{flip}}(x^0, y^0) = \{(x^0, y^0)\} \cup \{(x, y^0) : x \in \{0, 1\}^m \sum_{i \in I} |x_i - x_i^0| = 1\}$. In contrast, $N_{\text{alt}}(x^0, y^0) \cap N_{I^*}(x^0, y^0) = \{(x^0, y) : y \in \{0, 1\}^n\} \cup \{(x, y^0) : x \in \{0, 1\}^m, x_i = x_i^0 \text{ for } i \notin I^*\}$, i.e., $N_{\text{port}}^{k, m}(x, y)$ includes a large part of $N_{\text{alt}}(x, y)$. Moreover, $N_{\text{flip}}(x, y) \subset N_{\text{port}}^{k, m}(x, y)$ if the Random Portions heuristic is implemented as in Algorithm 5.

Let us now estimate the size of $N_{\text{port}}^{p, m}(x, y) \cap N_{\text{port}}^{k, m}(x, y)$. In particular, we will show that the probability of choosing a set I^* of size $p < k$ such that $N_{I^*}(x, y) \subset N_{\text{port}}^{k, m}(x, y)$ is low. Observe that

$$P(A \subset B) = \frac{k}{m} \cdot \frac{k-1}{m-1} \cdots \frac{k-p+1}{m-p+1} = \frac{k! \cdot (m-p)!}{m! \cdot (k-p)!},$$

if $A, B \in I$ are selected randomly, $|A| = p$ and $|B| = k$. Thus, the probability that $N^{I^*}(x, y) \subset N_{\text{port}}^{k,m}(x, y)$ if $|I^*| = p$ is

$$P(N^{I^*}(x, y) \subset N_{\text{port}}^{k,m}(x, y)) = 1 - \left(1 - \frac{k! \cdot (m-p)!}{m! \cdot (k-p)!}\right)^m. \quad (6)$$

Note that, in Algorithm 5, the sets I^* are not exactly arbitrary but for simplicity we can ignore it. For small k and p , $2 \leq p < k$, we have

$$\begin{aligned} \lim_{m \rightarrow \infty} P(N^{I^*}(x, y) \subset N_{\text{port}}^{k,m}(x, y)) \\ &= \lim_{m \rightarrow \infty} 1 - \left(1 - \frac{k!}{(k-p)!} \cdot \frac{1}{m^p}\right)^m \\ &= \lim_{m \rightarrow \infty} 1 - \exp\left(-\frac{k!}{(k-p)!m^{p-1}}\right) = 0. \end{aligned}$$

Even if $m = 100$, $k = 3$ and $p = 2$, the probability (6) is below 6%, i.e., only a small number of neighborhoods $N_{I^*}(x, y)$ dominated by $N_{\text{port}}^{k,m}(x, y)$ are selected within $N_{\text{port}}^{p,m}(x, y)$.

Thus, the neighborhood $N_{\text{VND}}(x, y)$ is significantly larger than any of its components which indicates the potential of the VND heuristic to yield superior solutions. Although the quick heuristics Alternating and Flip are mostly dominated by following algorithms, it is expected that they speed up the VND method.

Another variation of VND that we call *VND Exhaustive* alternates between the Alternating heuristic and the Exhaustive Portions algorithm. As for the Flip heuristic, our implementation of VND Exhaustive does not explore solutions $\{(x^0, y) : y \in \{0, 1\}^n\}$ within the Exhaustive Portions local search.

3.4. Multi-Start Algorithms

Multi-Start method is a simple yet efficient technique that have been applied to many combinatorial optimization problems (Martí, 2003). There exist several variations of the metaheuristic; the one that we used is as follows: (a) produce a random solution; (b) improve it; (c) save the obtained solution if it is better than the best one found so far; (d) terminate if the given time has elapsed or proceed to the next random solution otherwise.

We have three fast local search algorithms, namely Alternating, Flip and VND Exhaustive ($k = 1$). Thus, we consider three Multi-Start heuristics.

3.5. Row-Merge Algorithms

Another approach to reduce the size of the problem is to partition its rows into clusters and consider all the rows in each cluster merged together. Let $\mathcal{J} = \{I^1, I^2, \dots, I^k\}$ be a partition of I into clusters I^1, I^2, \dots, I^k . Introduce a problem $\text{BQP}(Q, c, d, \mathcal{J})$:

$$\text{maximize } x^T Q y + c x + d y \quad (7)$$

$$\text{subject to } x_i = x_\ell \text{ for } i, \ell \in C, C \in \mathcal{J}, \quad (8)$$

$$x \in \{0, 1\}^m, y \in \{0, 1\}^n. \quad (9)$$

To solve $\text{BQP}(Q, c, d, \mathcal{J})$, compute

$$q_{ij}^* = \sum_{r \in I^i} q_{rj}, \quad c_i^* = \sum_{r \in I^i} c_r \quad \text{and} \quad d^* = d$$

for $i \in \{1, 2, \dots, k\}$. Let (x^*, y^*) be an optimal solution of $\text{BQP}(Q^*, c^*, d^*)$, where $Q^* = (q_{ij}^*)$ is a $k \times n$ matrix. Let $x_r = x_i^*$ for each $r \in I^i$ and $i \in \{1, 2, \dots, k\}$. Then (x, y^*) is an optimal solution to $\text{BQP}(Q, c, d, \mathcal{J})$.

We call this method *Clustering Row-Merge* heuristic. Its quality depends significantly on the partition \mathcal{J} . In particular, it is expected that rows i and ℓ are ‘merged’ only if $x_i = x_\ell$ in most of near-optimal solutions of the problem. We propose the following partitioning technique.

Let S^1, S^2, \dots, S^p be p ‘good solution’ to $\text{BQP}(Q, c, d)$. Create a complete weighted graph G with a node set I . Let the weight $w_{i\ell}$ of an edge (i, ℓ) in G be the number of solutions $(x, y) \in \{S^1, S^2, \dots, S^p\}$ such that $x_i = x_\ell$. For a set of nodes $C \subseteq I$, let

$$\mu(C) = \begin{cases} \min_{i \neq \ell \in C} w_{i\ell} & \text{if } |C| > 1, \\ p & \text{otherwise} \end{cases}$$

and

$$w(C) = |C| \cdot \mu(C). \quad (10)$$

Define the *Partitioning Problem* be the problem of finding a partition $\mathcal{J} = \{I^1, I^2, \dots, I^k\}$ of a given size k such that $w(\mathcal{J}) = \sum_{i=1}^k w(I^i)$ is maximized. Since the weight $w(I^i)$ of a cluster I^i is proportional to the weight of the lightest edge in the clique induced by I^i , the elements of such a partition will tend to have no light edges. It is important to note that $w(C)$ is also proportional to the cardinality of C and, hence, it is preferable to have the number of clusters with light edges as small as possible.

Theorem 3. *The Partitioning Problem is strongly NP-hard even if $k = 2$.*

Proof. We reduce the maximum cliqu problem to the partitioning problem. Let $G = (I, E)$ be a given graph. Let $G' = (I', E')$ be a complete weighted graph with node set $I' = I \cup \{v\}$. Let $w_{i\ell} = p$ if $(i, \ell) \in E$ and $w_{i\ell} = 0$ otherwise, where $w_{i\ell}$ is a weight assigned to the edge $(i, \ell) \in E$. Observe that in such a graph, $w(C) = |C|p$ if $C \subset I'$ is a clique and $w(C) = 0$ otherwise (see 10).

Let $k = 2$ and $\mathcal{J} = \{I^1, I^2\}$ be an optimal partition of I' . For simplicity, assume $v \in I^1$. Then there exist the following options:

1. If $|I| = 1$, the problem is trivial, and the maximum clique in G is I .
2. If $w(\mathcal{J}) = p$, the graph G is an independent set. Indeed, if there exists an edge $(i, \ell) \in E$, then setting $I^2 = \{i, \ell\}$ and $I^1 = I' \setminus I^2$ would result in $w(\mathcal{J}) = 2p$. If $|I| = 1$, the partition $I^1 = \{v\}$ and $I^2 = I$ provides a solution with objective value $2p$.

3. If $w(\mathcal{J}) = |I'|p$, then G is complete. Indeed, if $|I^1| > 1$, then I^1 is not a clique and, thus, $w(I^1) = 0$. Provided that $w(I^2) \leq |I^2|p < |I'|p$, we get $I^1 = \{v\}$ and $w(I^1) = p$. Therefore, $w(I^2) = |I|p$ and, thus, $I^2 = I$ is a clique in G , i.e., G is complete.
4. If $p < w(\mathcal{J}) < |I'|p$, then I^2 is a maximum clique in G . Indeed, if I^2 is not a clique in G , then $w(I^2) = 0$ and $w(\mathcal{J}) \leq p$ since $w(I^1) \leq p$. Thus, I^2 is a clique and $|I^1| > 1$ resulting in $w(I^1) = 0$. Observe that $w(\mathcal{J}) = |I^2|p$ and, therefore, I^2 is maximized. The result follows.
5. Note that $w(\mathcal{J}) \geq p$ for any graph G because the weight of a partition $I^1 = \{v\}$ and $I^2 = I$ is at least p .

□

Since the Partitioning Problem is NP-hard, we use a heuristic approach to solve it. Consider the *Greedy Partitioning Algorithm* that proceeds as follows. Create a partition $\mathcal{J} = \{\{1\}, \{2\}, \dots, \{m\}\}$. In each iteration, choose a pair $P, Q \in \mathcal{J}$ such that $w(\mathcal{J} \cup \{P \cup Q\} \setminus \{P, Q\})$ is maximized and update $\mathcal{J} \leftarrow \mathcal{J} \cup \{P \cup Q\} \setminus \{P, Q\}$. Repeat this until $|\mathcal{J}| = k$.

The algorithm performs $m - k$ iterations. In each iteration, there are m^2 pairs of elements of \mathcal{J} to be compared. It takes $O(m^2)$ time to calculate the weight of a merged cluster. Hence, the time complexity of the Greedy Partitioning Algorithm is $O(m^5)$, which is unreasonable even for moderate instances. The following is a modification of the algorithm that terminates in $O(m^2 \log m)$ time.

For $P, Q \subset I$, let $\delta(P, Q) = w(P \cup Q) - w(P) - w(Q)$ and $\mu(P, Q) = \mu(P \cup Q)$. Set $\mu(P) = p$ for each P in the initial partition $\mathcal{J} = \{\{1\}, \{2\}, \dots, \{m\}\}$. Calculate the values $\mu(P, Q)$ for each $P \neq Q \in \mathcal{J}$ and place all these pairs in an ordered set L . Sort L by $\delta(P, Q)$ in descending order. Let (P, Q) be the first element in L . Merge P and Q by updating $\mathcal{J} \leftarrow \mathcal{J} \cup \{P \cup Q\} \setminus \{P, Q\}$. Remove (P, Q) from L . For each $R \in \mathcal{J} \setminus \{P \cup Q\}$, also remove (R, P) and (R, Q) from L and insert $(R, P \cup Q)$ such that the ordering of L is preserved. Note that $\mu(P \cup Q) = \mu(P, Q)$ and $\mu(R, P \cup Q)$ can be calculated in $O(1)$ time as

$$\mu(R, P \cup Q) = \min \{ \mu(P, Q), \mu(R, P), \mu(R, Q) \}.$$

Repeat the procedure until $|\mathcal{J}| = k$. The first iteration of the algorithm takes $O(m^2 \log m)$ time. Then, on each iteration, the algorithm spends $O(m \log m)$ time to update L and the values of μ . Since the number of iterations is $m - k$, the total complexity of the algorithm is $O(m^2 \log m)$.

By exploiting the fact that p is usually a small fixed number, we are able to further speed up the Greedy Partitioning Algorithm. Observe that $-pm \leq \delta(P, Q) \leq 0$. For each $w = -pm, -pm + 1, \dots, 0$, introduce a list a_w that contains all the pairs (P, Q) such that $\delta(P, Q) = w$, where P and Q are in the initial partition. Creating such lists

takes only $O(m^2)$ time. On every iteration, select an arbitrary pair of cliques $(P, Q) \in a_w$, where w is the largest index such that $a_w \neq \emptyset$. Since the number of lists a_w is $O(m)$, this operation takes only $O(m)$ time. The updating procedure is similar to the one described above and also takes $O(m)$ time. Thus, the complexity of the algorithm is $O(m^2)$. We used this implementation in the Clustering Row-Merge algorithm.

Observe that both implementations of the Greedy Partitioning Algorithm require quick operations with pairs (P, Q) . In our implementation, we maintain a hash table for each $P \in \mathcal{J}$. Such a hash table stores all the pairs (P, Q) , where $Q \in \mathcal{J}$. As the hash key, we use the first vertex Q_1 in Q . Since the clusters are non-intersecting, such a key is unique and limited by $1 \leq Q_1 \leq m$.

The Clustering Row-Merge heuristic effectively exploits information obtained from several near-optimal solutions of the problem and, thus, may be useful in evolutionary algorithms and other metaheuristics. However, if such solutions are unavailable, the Clustering Row-Merge algorithm cannot be used. In order to apply the idea of row merging in a standalone heuristic, we propose the following method. Generate a random partition $\mathcal{J} = \{I^1, I^2, \dots, I^k\}$ of I such that $I^i \neq \emptyset$ for each i . Solve BQP(Q, c, d, \mathcal{J}) as described above and improve the resulting solution with a fast local search. If the obtained solution is better than the best known so far, save it. Repeat the procedure until the given time is elapsed. We call this method *Multi-Start Row-Merge*.

The Multi-Start Row-Merge algorithm can be modified to be used as an improvement procedure. Let (x, y) be the starting solution. Generate a random partition $\mathcal{J}(x)$ of I of size k such that $x_i = x_\ell$ for each $x, \ell \in C$, where $C \in \mathcal{J}(x)$. A solution to BQP($Q, c, d, \mathcal{J}(x)$) is the best solution in the neighborhood $N_{\text{merge}}(x^0, y^0) = \{(x, y) : x \in \{0, 1\}^m, x_i = x_\ell \text{ if } i, \ell \in C, \text{ where } C \in \mathcal{J}(x^0), \text{ and } y \in \{0, 1\}^n\}$. The size of this neighborhood is $|N_{\text{merge}}(x^0, y^0)| = 2^{k+n}$ and it takes $O(n2^k)$ time to explore it. Observe that $(x, y) \in N_{\text{merge}}(x, y)$ and, thus, the corresponding local search never worsens the solution. We call this improvement procedure *Row-Merge Local Search*.

Assume $(x, y) \in N_{\text{merge}}(x^0, y^0)$ is an improvement over (x^0, y^0) . Then x is different from x^0 in at least $|C|$ values, where $C \in \mathcal{J}(x^0)$. Intuitively, it is unlikely that such an improvement is possible if (x^0, y^0) is a near-optimal solution and the cluster C is large. Thus, this local search can be efficient only if k is large. Hence, it is impractical to solve BQP($Q, c, d, \mathcal{J}(x)$) exactly. Note, however, that a heuristic solution to BQP($Q, c, d, \mathcal{J}(x)$) may be worse than (x^0, y^0) and, thus, the Row-Merge Local Search algorithm needs to evaluate a solution before accepting it.

4. Testbed

There is no standard testbed available in the literature for BQP. Thus, we have created a testbed consisting of five

instance types that correspond to some real applications of the problem.

In order to generate some of the instances, we will need random bipartite graphs. To generate a random bipartite graph $G = (V, U, E)$, we define seven parameters, namely $m = |V|$, $n = |U|$, \underline{d}_1 , \bar{d}_1 , \underline{d}_2 , \bar{d}_2 and μ such that $0 \leq \underline{d}_1 \leq \bar{d}_1 \leq n$, $0 \leq \underline{d}_2 \leq \bar{d}_2 \leq m$, $m\underline{d}_1 \leq n\bar{d}_2$ and $m\bar{d}_1 \geq n\underline{d}_2$.

The bipartite graph generator proceeds as follows.

1. For each node $v \in V$, set d_v as a uniformly distributed random integer in the range $\underline{d}_1 \leq d_v \leq \bar{d}_1$.
2. For each node $u \in U$, set d_u as a uniformly distributed random integer in the range $\underline{d}_2 \leq d_u \leq \bar{d}_2$.
3. While $\sum_{v \in V} d_v \neq \sum_{u \in U} d_u$, alternatively select a node in V or U and regenerate its degree as described above.¹
4. Create a bipartite graph $G = (V, U, E)$, where $E = \emptyset$.
5. Select a node $v \in V$ such that $d_v > \deg v$ (if no such node exists, go to the next step). Let $U' = \{u \in U : \deg u < d_u \text{ and } (v, u) \notin E\}$. If $U' \neq \emptyset$, select a node $u \in U'$ randomly. Otherwise randomly select a node $u \in U$ such that $(v, u) \notin E$ and $d_u > 0$; randomly select a node $v' \in V$ adjacent to u and delete the edge (v', u) . Add an edge (v, u) . Repeat this step.
6. For each edge $(v, u) \in E$, the weight w_{vu} is a normally distributed integer ($\sigma = 100$ and μ is given).

The following are the instance types used in our computational experiments.

1. The *Random* instances are as follows: q_{ij} , c_i and d_j are normally distributed random integers with $\mu = 0$ and $\sigma = 100$.
2. The *Max Biclique* instances model the problem of finding a biclique of the maximum weight in a bipartite graph. Let $G = (I, J, E)$ be a random bipartite graph with $\underline{d}_1 = n/5$, $\bar{d}_1 = n$, $\underline{d}_2 = m/5$, $\bar{d}_2 = m$ and $\mu = 100$. Note that setting μ to 0 would make the weight of any large biclique likely to be around 0 and, thus, the landscape of the problem would be rather flat. If w_{ij} is the weight of an edge $(i, j) \in E$, set $q_{ij} = w_{ij}$ for every $i \in I$ and $j \in J$ if $(i, j) \in E$ and $q_{ij} = -M$ otherwise, where M is large number. Set $c = \mathbf{0}^m$ and $d = \mathbf{0}^n$.

¹In practice, if $m(\underline{d}_1 + \bar{d}_1) \approx n(\underline{d}_2 + \bar{d}_2)$, this algorithm converges very quickly. However, in theory it may not terminate in finite time. Thus, one can update it as follows. If the equality $\sum_{v \in V} d_v = \sum_{u \in U} d_u$ is not achieved after a certain number of iterations, start a fixing procedure as follows. Let $\delta = 1$ if $\sum_{v \in V} d_v < \sum_{u \in U} d_u$ and $\delta = -1$ otherwise. While $\sum_{v \in V} d_v \neq \sum_{u \in U} d_u$ and $m\underline{d}_1 \leq \delta + \sum_{v \in V} d_v \leq m\bar{d}_1$, select randomly $v \in V$ such that $\underline{d}_1 \leq d_v + \delta \leq \bar{d}_1$ and update $d_v \leftarrow d_v + \delta$. While $\sum_{v \in V} d_v \neq \sum_{u \in U} d_u$, select randomly $u \in U$ such that $\underline{d}_2 \leq d_u - \delta \leq \bar{d}_2$ and update $d_u \leftarrow d_u - \delta$.

3. The *Max Induced Subgraph* instances model the problem of finding a subset of nodes in a bipartite graph that maximizes the total weight of the resulting induced subgraph. The Max Induced Subgraph instances are similar to the Max Biclique instances except that $q_{ij} = 0$ if $(i, j) \notin E$ and $\mu = 0$. The latter change is needed because having too many edges with positive weights would make the problem very simple (indeed, including all or almost all the nodes would yield a good solution).
4. The *MaxCut* instances model the MaxCut problem as follows. First, we generate a random bipartite graph as for the Max Induced Subgraph instances. Then, we set $q_{ij} = -2w_{ij}$ if $(i, j) \in E$ and $q_{ij} = 0$ if $(i, j) \notin E$. Finally, we set $c_i = \frac{1}{2} \sum_{j \in J} q_{ij}$ and $d_j = \frac{1}{2} \sum_{i \in I} q_{ij}$. For an explanation, see (Punnen et al., 2012).
5. The *Matrix Factorization* instances model the problem of producing a rank one approximation of a binary matrix. The original matrix $H = (h_{ij})$ (see Section 1) is generated randomly with probability 0.5 of $h_{ij} = 1$. The values of q_{ij} are then calculated as $q_{ij} = 1 - 2h_{ij}$, and $c = \mathbf{0}^m$ and $d = \mathbf{0}^n$.

The proposed instances are hard to solve exactly and, thus, we are unaware of the optimal objective values of any of the moderate and large instances used in our computational experiments. Thus, in our experiments, we use the best known objective values to evaluate the quality of the obtained solutions. All our test instances and best known solutions can be found at <http://www.sfu.ca/~dkarapet/>

5. Empirical Evaluation

In this section, we provide empirical analysis of the algorithms discussed above. Our experiments were conducted on an Intel i7-2600 CPU based PC. All the algorithms are implemented in C# 4.0, and no concurrency is used.

Where appropriate, we denote the algorithms as follows. ‘Rn’, ‘G’, ‘A’ and ‘F’ stand for Random (a procedure that generates a random solution), Greedy, Alternating and Flip algorithms, respectively. We use parentheses to indicate the initial solution for a local search. For example, ‘A(G)’ denotes the Alternating local search applied to a Greedy solution. ‘P_k’, ‘V_k’ and V_k^{ex} stand for Random Portions, VND and VND Exhaustive algorithms, respectively. Multi-Start metaheuristic is denoted by ‘M’, where the local search procedure is specified in parentheses. The Clustering Row-Merge, Multi-Start Row-Merge and Row-Merge Local Search algorithms are denoted by ‘R_k’, ‘R_k^m’ and ‘R_k^{ls}’, respectively.

5.1. Exact Algorithms

Several of the heuristic techniques described above require an exact algorithm to solve a reduced problem. In

this study, we tested two algorithms. We call the first algorithm *Exhaustive Enumeration*. Since calculation of the optimal y for a fixed x can be done efficiently, we only need to try all possible x , i.e., 2^m values. Thus, with a careful implementation, this algorithm terminates in $O(n2^m)$ time. The second algorithm uses a mixed integer programming solver applied to the following problem:

$$\begin{aligned} & \text{maximize} && \sum_{i \in I} \sum_{j \in J} q_{ij} z_{ij} + \sum_{i \in I} c_i x_i + \sum_{j \in J} d_j y_j \\ & \text{subject to} && \\ & && z_{ij} \leq x_i && \text{for } i \in I \text{ and } j \in J, \\ & && z_{ij} \leq y_j && \text{for } i \in I \text{ and } j \in J, \\ & && z_{ij} \geq x_i + y_j - 1 && \text{for } i \in I \text{ and } j \in J, \\ & && x_i \in \{0, 1\} && \text{for } i \in I, \\ & && 0 \leq y_j \leq 1 && \text{for } j \in J, \\ & && 0 \leq z_{ij} \leq 1 && \text{for } i \in I \text{ and } j \in J. \end{aligned}$$

We will refer to this as *MIP* approach.

As a mixed integer programming solver, we used CPLEX 12.4. An important parameter of CPLEX is the branch and bound strategy of the solver. We found that the feasibility emphasis usually provides the best performance in our experiments. For the other CPLEX parameters, we used the default values except that we disabled multithreading. To produce starting solutions for the MIP approach, we used the Greedy algorithm followed by the Alternating local search. Giving a starting solution is not necessary for CPLEX but we found that providing it speeds up the optimization.

The results of our experiments with the exact algorithms are reported in Table 1. The performance of the Exhaustive Enumeration method practically does not depend on the instance type; on our computational platform, the running time of the Exhaustive Enumeration algorithm can be roughly approximated as

$$t_{\text{exhaustive}} = 10^{-8} \cdot n2^m \text{ sec.} \quad (11)$$

In contrast, the behaviour of the MIP approach significantly depends on the size and the type of the problem, see Table 1. Observe that the MIP approach usually outperforms the Exhaustive Enumeration algorithm, especially for larger instances. This result, however, holds only for small values of n . Indeed, the performance of the MIP approach algorithm dramatically depends on the number of columns while the performance of the Exhaustive Enumeration algorithm is linear in n , see Figure 1. Thus, the Exhaustive Enumeration algorithm is clearly the best choice for the instances with large n . Since the reduced problems arising within Random Portions, VND and Row-Merge heuristics preserve the number of columns of the original instance, we used the Exhaustive Enumeration algorithm in our implementations when an exact solution was needed.

Another interesting observation is that the integer programming formulation cannot be used to obtain a good

upper bound for the BQP. The LP relaxation of the problem provides an objective that is normally several times larger than that of the optimal solution. One can also use a mixed integer program solver to find an upper bound by giving it a limited time. We noticed, however, that, in case of the BQP, the gap between the lower and the upper bounds is usually large until the very last steps of the algorithm, see Figure 2.

It is interesting to test the heuristic algorithms on the small instances. Our experiments showed that the performance of the fastest algorithms (Greedy, Alternating, Flip and VND Exhaustive ($k = 1$)) is relatively good, on average, but those algorithms rarely reach the optimality. Increasing the value of k in the VND Exhaustive heuristic significantly improves the solution quality. However, even when $k = 7$, VND Exhaustive was not able to obtain optimal solutions for certain instances while the running time of the heuristic was roughly 10 minutes for each of the instances of size 50×50 .

It turns out that one of the most efficient approaches for the small instances is the Multi-Start heuristic used with a fast local search. Even being given only 10 iterations, $M(V_1^{\text{ex}})$ produced optimal solutions for all the Random instances.² With 100 iterations, $M(V_1^{\text{ex}})$ reaches optimality for all the Random, Max Induced Subgraph, Max-Cut and Matrix Factorization instances. By further increasing the number of iterations, we were able to improve the quality of $M(V_1^{\text{ex}})$ solutions for the Max Biclique problems though, even for 100 000 iterations, the algorithm did not reach the optimal solution for the Max Biclique problem of size 50×50 . Note, however, that for most of the test instances, $M(V_1^{\text{ex}})$ (100 000 iterations) terminated in less than 10 seconds. Moreover, given only 1000 iterations, $M(V_1^{\text{ex}})$ performs as good as if it is given 100 000 iterations.

The Row-Merge heuristics also work well for the small instances. For example, R_{20}^m , where the reduced problem is solved with V_2^{ex} and that is given as much time as V_4^{ex} takes to solve the corresponding instance (i.e., less than 1 second for most of the instances), yielded optimal solutions for all the test problems.

5.2. Fast Heuristics

We first analyse the performance of our fastest heuristics: Random, Greedy, Alternating, Flip and VND Exhaustive ($k = 1$). The results of the experiments for the Random instances can be found in Table 2. For each of the heuristics, the table reports the relative gap between the solution obtained and the best known solution, and the running time. The objective gap is calculated as

$$\text{gap}(f) = \frac{f_{\text{best}} - f}{f_{\text{best}}} \cdot 100\%, \quad (12)$$

²In fact, optimal solutions to some of the test problem were not available to us (see Table 1), in which cases we used the best known solutions to evaluate the heuristics.

$m \times n$	Random	Max Bicli.	Max Ind.	MaxCut	Matr. Fact.	Exhaustive En.
20×50	2.2	0.2	0.8	4.2	23.2	0.5
25×50	64.9	0.4	3.1	55.3	419.9	15.0
30×50	217.6	1.3	62.4	721.5	4 820.1	475.5
35×50	10 956.4	0.8	45.8	3 413.6	—	14 211.0
40×50	—	4.2	124.4	—	—	$\approx 5.5 \cdot 10^5$
45×50	—	7.4	691.3	—	—	$\approx 1.8 \cdot 10^7$
50×50	—	35.7	2 658.6	—	—	$\approx 5.6 \cdot 10^8$

Table 1: Evaluation of exact algorithms. For each instance, the running time, in seconds, is reported for the MIP approach (if it does not exceed 5 hours). The last column reports the running time of the Exhaustive Enumeration algorithm, in seconds, for the Random instances of the given size (for the instances of size $m \geq 40$, the reported times are obtained according to (11)). The running time of the MIP approach includes the time spent on generating starting solutions.

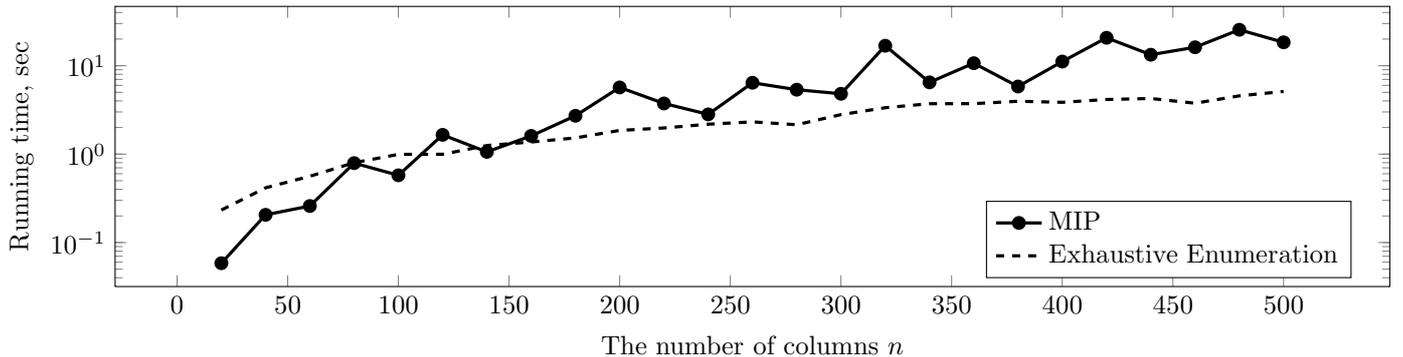


Figure 1: The performance of the MIP approach significantly depends on the number of columns n while the running time of the Exhaustive Enumeration algorithm is linear in n . The experiment was conducted for Max Biclique instances, $m = 20$, $n = 20, 40, \dots, 500$.

where f is the objective value of the solution obtained and f_{best} is the objective of the best known solution for that test instance (note that for any practical instance $f_{\text{best}} > 0$). Where uncertainty is present (e.g., in ‘Rn’ or ‘A(Rn)’), the experiment is repeated 10 times, and the average value is reported. The last row of the table reports the average objective gap and the average running time for each heuristic. These values, however, should be considered with caution as, e.g., the running times of a heuristic may vary dramatically for different instances.

Recall that the expected objective of a random solution can be calculated according to (1). Since the expectation for all the weights in a Random instance is 0, the objectives of all the resulting solutions are also close to 0 and the objective gaps are close to 100%, see (12). This result also holds for the Max Induced Subgraph, MaxCut and Matrix Factorization problems. However, it is different for a Max Biclique instance for which the expected objective value is a large negative number (recall that, in a Max Biclique problem, $q_{ij} = -M$ if there is no edge between i and j in the original bipartite graph). Thus, the objective gaps of the random solutions for Max Biclique are very large, and the Alternating algorithm quickly converges to near-zero solutions (recall that, according to Theorem 2, the solution improved with the Alternating local search can never have negative objective). It shows that the Alternating algorithm normally should not be applied to so-

lutions with negative objective values as the Alternating local search tends to fall into a trivial local maximum of $(x, y) = (\mathbf{0}^m, \mathbf{0}^n)$ in such cases. Also note that, among the quick heuristics, $V_1^{\text{ex}}(\text{Rn})$ shows the best performance for Max Biclique problems and $F(\text{Rn})$ performs poorly.

Other than that, the performance of the fast heuristics has the same pattern for the other instance types. The Greedy algorithm is a good option to obtain a reasonable solution in a very short time; it is the fastest heuristic in most of the experiments. The Alternating and Flip algorithms are yet two fast and efficient local searches; the Alternating heuristic performs faster but the Flip algorithm yields better solutions. The solution quality of V_1^{ex} is similar to that of the Flip heuristic though V_1^{ex} is notably slower. However, the neighborhood of V_1^{ex} is clearly larger than that of the Flip local search and, thus, being applied to a near-optimal solution, V_1^{ex} is expected to demonstrate superior performance.

Whether we start a local search from a random or a Greedy solution, the performance of the local searches remains approximately the same. However, we noticed that starting from the Greedy algorithm yields, on average, slightly better solutions and, thus, in what follows, we use Greedy solutions as the starting ones by default.

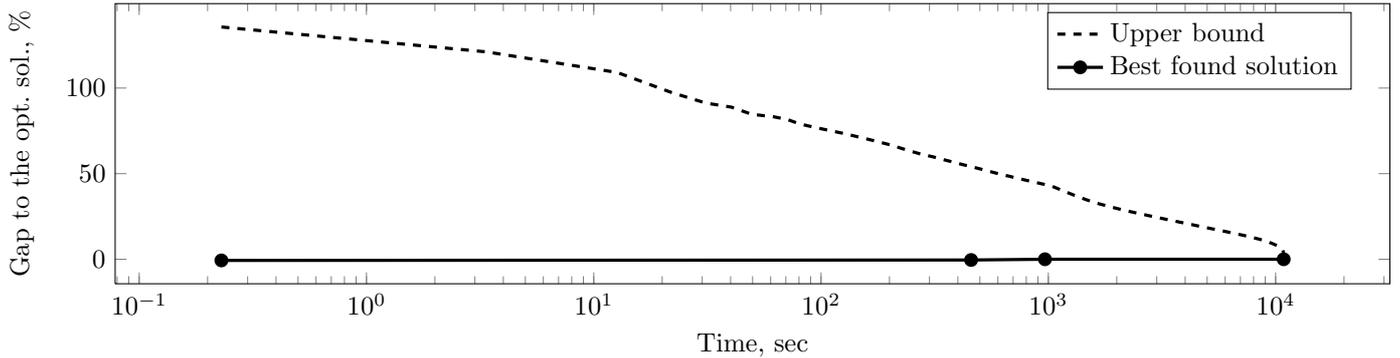


Figure 2: The progress of the MIP algorithm for a Random instance of size 35×50 . The gap between the proven upper bound and the optimal solution remains significant until the very last steps of the algorithm. The starting solution is only 0.68% away from the optimal one, and the optimal solution is obtained after 966 seconds.

$m \times n$	Gap to the best known, %								Time, ms			
	Rn	G	A(Rn)	A(G)	F(Rn)	F(G)	$V_1^{\text{ex}}(\text{Rn})$	$V_1^{\text{ex}}(\text{G})$	G	A(G)	F(G)	$V_1^{\text{ex}}(\text{G})$
200×1000	103.4	1.8	2.9	0.3	0.3	<u>0.1</u>	0.4	0.2	<u>3.4</u>	5.4	10.3	30.3
400×1000	101.1	3.0	1.9	1.6	<u>0.5</u>	0.9	0.6	0.5	<u>7.6</u>	11.7	16.3	43.5
600×1000	98.5	4.7	1.3	1.4	<u>0.6</u>	1.0	0.7	0.8	<u>7.6</u>	12.8	25.0	78.9
800×1000	100.7	4.1	1.2	0.9	<u>0.5</u>	0.6	0.7	0.8	<u>11.2</u>	19.9	46.7	83.4
1000×1000	102.9	4.0	1.1	1.2	0.9	<u>0.4</u>	0.9	1.1	<u>18.1</u>	29.4	54.4	79.9
1000×5000	99.2	2.6	1.7	1.3	0.3	0.3	0.3	<u>0.2</u>	<u>85.3</u>	155.1	493.3	897.0
2000×5000	99.2	3.4	1.2	0.8	<u>0.4</u>	0.4	0.5	0.4	<u>186.7</u>	354.3	992.0	2670.9
3000×5000	101.3	3.6	0.9	0.7	0.4	<u>0.1</u>	0.5	0.3	<u>278.7</u>	508.9	2544.9	4530.5
4000×5000	100.5	3.9	0.7	0.7	0.3	0.4	0.5	<u>0.2</u>	<u>369.4</u>	685.3	1557.7	6301.4
5000×5000	99.5	4.2	0.8	0.7	<u>0.6</u>	0.6	0.6	0.7	<u>460.7</u>	1009.4	4761.4	1492.0
Average	100.6	3.5	1.4	1.0	<u>0.5</u>	0.5	0.6	0.5	<u>142.9</u>	279.2	1050.2	1620.8

Table 2: Evaluation of fast heuristics on the Random instances. The running times of the local searches started from random solutions are close to those started from Greedy solutions. The time needed to generate a random solution is negligible and, thus, is also skipped.

5.3. Portions-Based and Multi-Start Heuristics

In Table 3, we compare Portions-based and Multi-Start heuristics, which include the VND Exhaustive (V_k^{ex}), VND (V_k), Random Portions (P_k) and Multi-Start ($M(A)$, $M(F)$ and $M(V_1^{\text{ex}})$) algorithms. For a fair competition, we give each of the Random Portions and Multi-Start algorithms the same amount of time as the VND ($k = 6$) takes to solve the corresponding instance. We also studied performance of the heuristics being given smaller and larger times but this did not yield any new observations.

The most successful heuristic in this series of experiments is Multi-Start based on either Flip or V_1^{ex} local search. Usually, $M(F)$ dominates $M(V_1^{\text{ex}})$; indeed, according to Table 2, Flip is significantly faster than V_1^{ex} and, thus, Multi-Start is able to complete more iterations when using the Flip improvement procedure. However, for the Max Biclique instances, $M(F)$ performs very poorly as a result of $F(\text{Rn})$ low performance (see Section 5.2) and, therefore, $M(V_1^{\text{ex}})$ is preferable for the instances like Max Biclique.

It is worth noting that for the Matrix Factorization instances, the Multi-Start algorithms are sometimes domi-

nated by the P_3 and/or P_4 heuristics although, on average, $M(F)$ shows slightly better performance; a possible reason for that is discussed in Section 5.4. In several experiments, $M(F)$ and $M(V_1^{\text{ex}})$ were also outperformed by V_2^{ex} but at the cost of unreasonable running times. We suggest to use V_k^{ex} with $k > 1$ only for relatively small instances.

According to our experiments, the optimal value of k for the Random Portions heuristic is $k = 4$ (sometimes $k = 3$). We conducted the tests for a wide range of k , given times and instances, and P^4 was the winner in most such experiments. We believe, however, that, being given better starting solutions, the Random Portions heuristic would benefit from a larger value of k .

Performance of the VND ($k = 6$) is slightly worse, on average, than that of P_4 , and this tendency holds for all the instance types. In our experiments, we also tried a modification of the VND heuristic that restarts immediately after finding an improvement. Considering that the P_k algorithm is usually significantly slower than the Alternating and Flip local searches, this could speed up the heuristic. However, our experiments showed that such a change did not improve the performance of the VND.

$m \times n$	Gap to the best known, %										Time, sec		
	V_1^{ex}	V_2^{ex}	V_6	M(A)	M(F)	$M(V_1^{\text{ex}})$	P_3	P_4	P_6	P_8	V_1^{ex}	V_2^{ex}	V_6
200×1000	0.15	0.10	0.11	0.94	<u>0.00</u>	0.03	0.12	0.10	0.11	0.14	<u>0.0</u>	1.0	0.3
400×1000	0.52	0.52	0.52	0.61	0.12	<u>0.09</u>	0.41	0.40	0.40	0.63	<u>0.0</u>	2.3	0.5
600×1000	0.79	0.57	0.73	0.32	<u>0.12</u>	0.15	0.71	0.63	0.70	0.68	<u>0.1</u>	15.0	0.8
800×1000	0.75	0.60	0.72	0.43	<u>0.22</u>	0.27	0.51	0.50	0.57	0.55	<u>0.1</u>	30.4	1.8
1000×1000	1.08	0.90	1.07	0.41	<u>0.28</u>	0.32	0.46	0.49	0.52	0.56	<u>0.1</u>	47.2	2.1
1000×5000	0.20	0.19	0.20	1.08	<u>0.14</u>	0.15	0.27	0.29	0.26	0.28	<u>0.9</u>	220.0	10.4
2000×5000	0.40	0.40	0.40	0.74	<u>0.21</u>	0.23	0.35	0.35	0.34	0.36	<u>2.7</u>	998.7	19.6
3000×5000	0.33	0.33	0.33	0.48	<u>0.15</u>	0.21	0.29	0.28	0.34	0.25	<u>4.5</u>	554.1	34.4
4000×5000	0.24	0.20	0.24	0.38	<u>0.19</u>	0.25	0.37	0.36	0.37	0.36	<u>6.3</u>	5 256.9	42.9
5000×5000	0.73	0.38	0.73	0.45	0.33	<u>0.32</u>	0.48	0.56	0.50	0.48	<u>1.5</u>	27 688.1	46.2
Average	0.52	0.42	0.51	0.58	<u>0.18</u>	0.20	0.40	0.40	0.41	0.43	<u>1.6</u>	3 481.4	15.9

Table 3: Evaluation of slow heuristics on the Random instances. The running times of M(A), M(F), $M(V_1^{\text{ex}})$, P_3 , P_4 , P_6 and P_8 are equal to that of V_6 .

5.4. Row-Merge Heuristics

Unlike all other algorithms discussed above, the Clustering Row-Merge heuristic requires a number of good solutions to perform row clusterization. In an evolutionary algorithm, one can, e.g., use a subset of the last generation for this purpose. In iterative heuristics, one can use the best p distinct solutions obtained so far. In our experiments, we generate synthetic solutions by producing $p = 100$ random solutions which are then further improved with VND Exhaustive ($k = 1$). Note that we do not include the time spent on generating these solutions in the running time of the Clustering Row-Merge heuristic.

Recall that the Clustering Row-Merge algorithm solves a constrained version of the BQP. Thus, even if the obtained solution is optimal with respect to the BQP(Q, c, d, \mathcal{J}), it is unlikely that it remains a local maximum for either of the neighborhoods defined above after relaxation of the constraints (8). In our experiments, we apply V_1^{ex} to every solution obtained by the Clustering Row-Merge heuristic.

As it was mentioned in Section 3.5, the Row-Merge Local Search cannot be efficient if k is small. In particular, it is necessary to keep the clusters in \mathcal{J} small. Thus, we use $k = \lfloor m/2 \rfloor$, $k = \lfloor m/3 \rfloor$, etc. The resulting reduced BQP instances are, therefore, too large to be solved exactly. We use F(G) to obtain a solution (x^*, y^*) of such an instance and then apply the Flip local search to improve the restored solution (x, y) . Same algorithms are used within the Multi-Start Row-Merge heuristic as it also performs better for small clusters (indeed, if a random cluster is large, then there is a high chance that neither assigning 0 nor 1 to the corresponding variable x_{i^*} is reasonable). Note that these decisions were made after extensive experimentation with different construction and improvement procedures.

The results of computational experiments for the most successful variations of the Row-Merge heuristics are reported in Table 4. The Clustering Row-Merge heuristic shows outstanding performance for the Random instances and performs similarly to M(F) and $M(V_1^{\text{ex}})$ for the other

instances. Note, however, that generation of initial solutions (the corresponding procedure is denoted as M_{100} in Table 4) for the Clustering Row-Merge heuristic often takes more time than running the Clustering Row-Merge algorithm itself and produces solutions superior to the solutions obtained by the Clustering Row-Merge heuristic. Our experiments with different values of p showed that reduction on the number of initial solutions worsens the quality of the Clustering Row-Merge method. Hence, the Clustering Row-Merge algorithm is impractical as a standalone heuristic. We also tried to use a heuristic solver for the BQP(Q, c, d, \mathcal{J}) problems in order to increase the value of k . We noticed that the better is the heuristic solver and the larger is k , the higher is the quality of the resulting solutions. However, the best performance was observed for the exact algorithm for BQP(Q, c, d, \mathcal{J}) and $k = 15$ or $k = 20$. It is also worth mentioning that we expect that using better initial solutions for the Clustering Row-Merge heuristic would improve its performance.

The Multi-Start Row-Merge and Row-Merge Local Search algorithms demonstrate very good performance for certain instances. In particular, the Multi-Start Row-Merge and Row-Merge Local Search heuristics outperform, on average, all other heuristics for the Biclique and Matrix Factorization instances, respectively. Indeed, iterative improvements may not be efficient for the Biclique problems characterized by deep local maxima. The Multi-Start approach utilized in the Multi-Start Row-Merge algorithm is preferable in such a case. In contrast, the landscape of the Matrix Factorization instances is rather flat and iterative improvements work well for it. These results hold even if we allow more or less time to each of the heuristics.

6. Conclusion

In this work, we considered an important combinatorial optimization problem called Bipartite Unconstrained

Instance	Gap to the best known, %									Time, sec			
	V ₆	M ₁₀₀	M(F)	M(V ₁ ^{ex})	R ₁₅	R ₂₀	R _[m/2] ^m	R _[m/3] ^m	R _[m/2] ^{ls}	V ₆	M ₁₀₀	R ₁₅	R ₂₀
200 × 1000	0.11	<u>0.00</u>	0.00	0.03	0.08	0.03	0.01	0.00	0.11	<u>0.3</u>	1.2	0.3	9.1
400 × 1000	0.52	<u>0.06</u>	0.12	0.09	0.15	0.14	0.13	0.11	0.27	0.5	2.5	<u>0.4</u>	9.1
600 × 1000	0.73	<u>0.10</u>	0.12	0.15	0.22	0.22	0.12	0.18	0.40	0.8	3.4	<u>0.5</u>	9.2
800 × 1000	0.72	0.21	0.22	0.27	0.26	0.24	0.19	<u>0.16</u>	0.27	1.8	4.6	<u>0.6</u>	9.3
1000 × 1000	1.07	<u>0.22</u>	0.28	0.32	0.28	0.23	0.34	0.30	0.27	2.1	6.2	<u>0.8</u>	9.5
1000 × 5000	0.20	<u>0.08</u>	0.14	0.15	0.12	0.10	0.14	0.12	0.17	10.4	52.6	<u>3.9</u>	74.1
2000 × 5000	0.40	<u>0.16</u>	0.21	0.23	0.19	0.23	0.21	0.21	0.21	19.6	131.4	<u>6.2</u>	100.8
3000 × 5000	0.33	0.14	0.15	0.21	0.12	<u>0.10</u>	0.22	0.18	0.18	34.4	215.3	<u>12.8</u>	92.7
4000 × 5000	0.24	0.15	0.19	0.25	0.13	<u>0.10</u>	0.20	0.19	0.23	42.9	280.3	<u>29.6</u>	109.7
5000 × 5000	0.73	0.25	0.33	0.32	<u>0.09</u>	0.11	0.35	0.32	0.38	46.2	337.3	<u>34.7</u>	128.0
Average	0.51	<u>0.14</u>	0.18	0.20	0.16	0.15	0.19	0.18	0.25	15.9	103.5	<u>9.0</u>	55.1

Table 4: Evaluation of the Row-Merge heuristics on the Random instances. The running time of M(F), M(V₁^{ex}), R_[m/2]^m, R_[m/3]^m and R_[m/2]^{ls} is fixed to that of V₆. The algorithm M₁₀₀ denotes M(V₁^{ex}) terminated after 100 iterations.

0-1 Programming Problem. We proposed several heuristic approaches to construct and improve BQP solutions. Several fast algorithms such as the Greedy construction heuristic and the Flip local search may be a reasonable choice if the solution quality requirements are low.

The success of slower techniques significantly depends on the instance type. In particular, we noticed that simple Multi-Start heuristics perform very well for the Random instances. For the instances with rather flat landscapes, iterative improvement methods work better. For the problems having some ‘structure’ (i.e., not purely random instances), the Row-Merge heuristics, being used with small clusters, provide superior solution quality comparing to simple Multi-Start algorithms. Thus, we believe, this technique is of use in real applications.

The Clustering Row-Merge method also performs well for many problems though it can only be used within some metaheuristics. A more sophisticated VND algorithm did not work well in our experiments.

In addition to the heuristics, we compared two simple exact algorithms, namely the MIP approach and the Exhaustive algorithm. The former is generally faster for ‘square’ instances, i.e., when $n \approx m$, while the latter is significantly better when $n \gg m$.

In order to reduce the size of the manuscript, we excluded some of the tables from this paper. The full version of our experimental results, test instances and best known solutions are available at <http://www.sfu.ca/~dkarapet/>.

References

- Alon, N., Naor, A., 2006. Approximating the Cut-Norm via Grothendieck’s Inequality. *SIAM Journal on Computing* 35, 787–803.
- Ambühl, C., Mastrolilli, M., Svensson, O., 2011. Inapproximability Results for Maximum Edge Biclique, Minimum Linear Arrangement, and Sparsest Cut. *SIAM Journal on Computing* 40, 567–596.
- Billionnet, A., 2004. Quadratic 0-1 bibliography URL: <http://cedric.cnam.fr/fichiers/RC611.pdf>.
- Chang, W.C., Vakati, S., Krause, R., Eulenstein, O., 2012. Exploring biological interaction networks with tailored weighted quasi-bicliques. *BMC bioinformatics* 13 Suppl 1, S16.
- Gillis, N., Glineur, F., 2011. Low-Rank Matrix Approximation with Weights or Missing Data Is NP-Hard. *SIAM Journal on Matrix Analysis and Applications* 32, 1149–1165.
- Hansen, P., Mladenović, N., 2003. Variable Neighborhood Search, in: Glover, F., Kochenberger, G. (Eds.), *Handbook of Metaheuristics*. Kluwer Academic Publishers. volume 57. chapter 6, pp. 145–184.
- Karapetyan, D., Gutin, G., Goldengorin, B., 2009. Empirical evaluation of construction heuristics for the multidimensional assignment problem, in: Chan, J., Daykin, J.W., Rahman, M.S. (Eds.), *London Algorithmics 2008: Theory and Practice*, College Publications. pp. 107–122.
- Koyutürk, M., Grama, A., Ramakrishnan, N., 2005. Compression, clustering, and pattern discovery in very high-dimensional discrete-attribute data sets. *IEEE Transactions on Knowledge and Data Engineering* 17, 447–461.
- Koyutürk, M., Grama, A., Ramakrishnan, N., 2006. Nonorthogonal decomposition of binary matrices for bounded-error data compression and analysis. *ACM Transactions on Mathematical Software* 32, 33–69.
- Lu, H., Vaidya, J., Atluri, V., Shin, H., Jiang, L., 2011. Weighted Rank-One Binary Matrix Factorization, in: *Proceedings of the Eleventh SIAM International Conference on Data Mining*, SIAM / Omnipress. pp. 283–294.
- Martí, R., 2003. Multi-Start Methods, in: Glover, F., Kochenberger, G. (Eds.), *Handbook of Metaheuristics*. Kluwer Academic Publishers. volume 57. chapter 12, pp. 355–368.
- Punnen, A.P., Sripratak, P., Karapetyan, D., 2012. The bipartite unconstrained 0-1 quadratic programming problem: polynomially solvable cases. Submitted.
- Shen, B.h., Ji, S., Ye, J., 2009. Mining discrete patterns via binary matrix factorization, in: *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, ACM Press. p. 757.
- Tan, J., 2008. Inapproximability of Maximum Weighted Edge Biclique and Its Applications, in: *Proceedings of the 5th international conference on Theory and applications of models of computation*, Springer-Verlag. pp. 282–293.
- Tanay, A., Sharan, R., Shamir, R., 2002. Discovering statistically significant biclusters in gene expression data. *Bioinformatics* 18, S136–S144.